

# CombiSlim 1.10 HOODINI, Smart Touch



## COMBISLIM OVEN

10-tray combi oven (1/1 GN, 20/40 mm) or  
6-tray combi oven (1/1 GN, 60 mm)  
Electricity  
Injection steam  
SmartTouch® interface  
2-piece rack  
Temperature probe

## DIMENSIONS & WEIGHT


Width	514 mm
Height, table model	1339 mm
Height, with stand	2151 mm
Depth	1041 mm
Weight	115 kg net / 139 kg packed

## STANDARD SPECIFICATIONS

Voltage	3 NAC 400/415 V
Wattage	12.7/13.8 kW
Power consumption	21 A
Pre-fuse	According to local regulations
Water connection	3/4", outside
Drain	Ø40 mm, outside

## HOODINI SPECIFICATIONS

Voltage	208-240 V
Phase	1
Frequency	50/60 Hz
Rated current	9 A (2.2 kW)

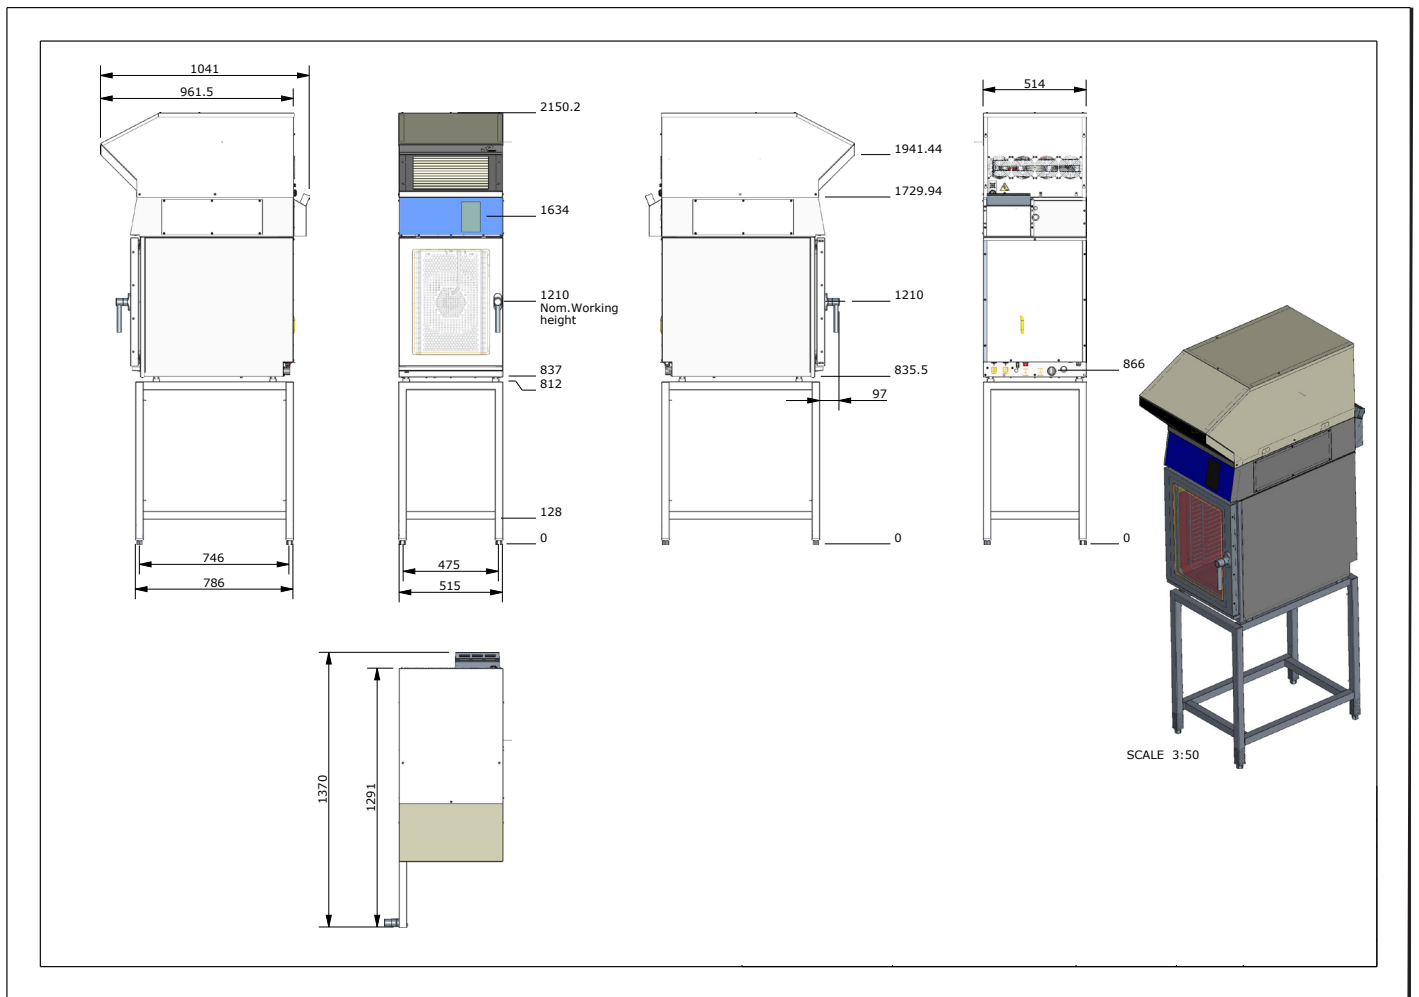

### Cooking modes:

- Hot air (convection)
- Steaming
- Low-temperature steaming
- Forced steaming
- CombiSmart® humidity control, 10 steps
- Cook & Regen
- Proving with automatic humidification
- Preheating
- Automatic cooling function
- Manual humidity pulsing
- Reversing, adjustable fan with 9 speeds
- SmartChef®, automatic cooking
- Automatic humidity pulsing
- RackTimer® with up to 20 timers
- Cool-down function
- Delta-T
- Cook & Hold

### Features:

- HOUNÖ PROTECT start kit
- Multipoint temperature probe
- Chef's recipe collection
- Baker's recipe collection
- Favourites selection
- HACCP quality control, 60 days in PDF format
- USB connection

### Optional features:

- Hand shower
- CombiWash® automatic cleaning system
- Let's Cook Cloud Solution
- Quick Select Recipes (QSR)
- Advanced RackTimer for tailored menu handling
- Keypad for temperature adjusting

### Unavailable solutions:

- CombiPlus and Marine

### Tested quality and safety:



FOR MORE INFORMATION, VISIT [WWW.HOUNO.COM](http://WWW.HOUNO.COM)