

CombiSlim 1.06 HOODINI, Smart Touch



STANDARD SPECIFICATIONS

Voltage	3 NAC 400/415 V
Wattage	8.4/9.2 kW
Power consumption	14 A
Pre-fuse	According to local regulations
Water connection	3/4", outside
Drain	Ø40 mm, outside

COMBISLIM OVEN

6-tray combi oven (1/1 GN, 20/40 mm) or
4-tray combi oven (1/1 GN, 60 mm)

Electricity

Injection steam

SmartTouch® interface

2-piece rack

Temperature probe

ALTERNATIVE SPECIFICATIONS


Voltage	208/230/240 V AC 1N
Wattage	6.9/8.4/9.2 kW
Power consumption	39 A
Pre-fuse	According to local regulations
Water connection	3/4", outside
Drain	Ø40 mm, outside

DIMENSIONS & WEIGHT

Width	514 mm
Height, table model	1138 mm
Height, with stand	1951 mm
Depth, table model	1041 mm
Weight	110 kg net / 125 kg packed

HOODINI SPECIFICATIONS

Voltage	208-240 V
Phase	1
Frequency	50/60 Hz
Rated current	9 A (2.2 kW)

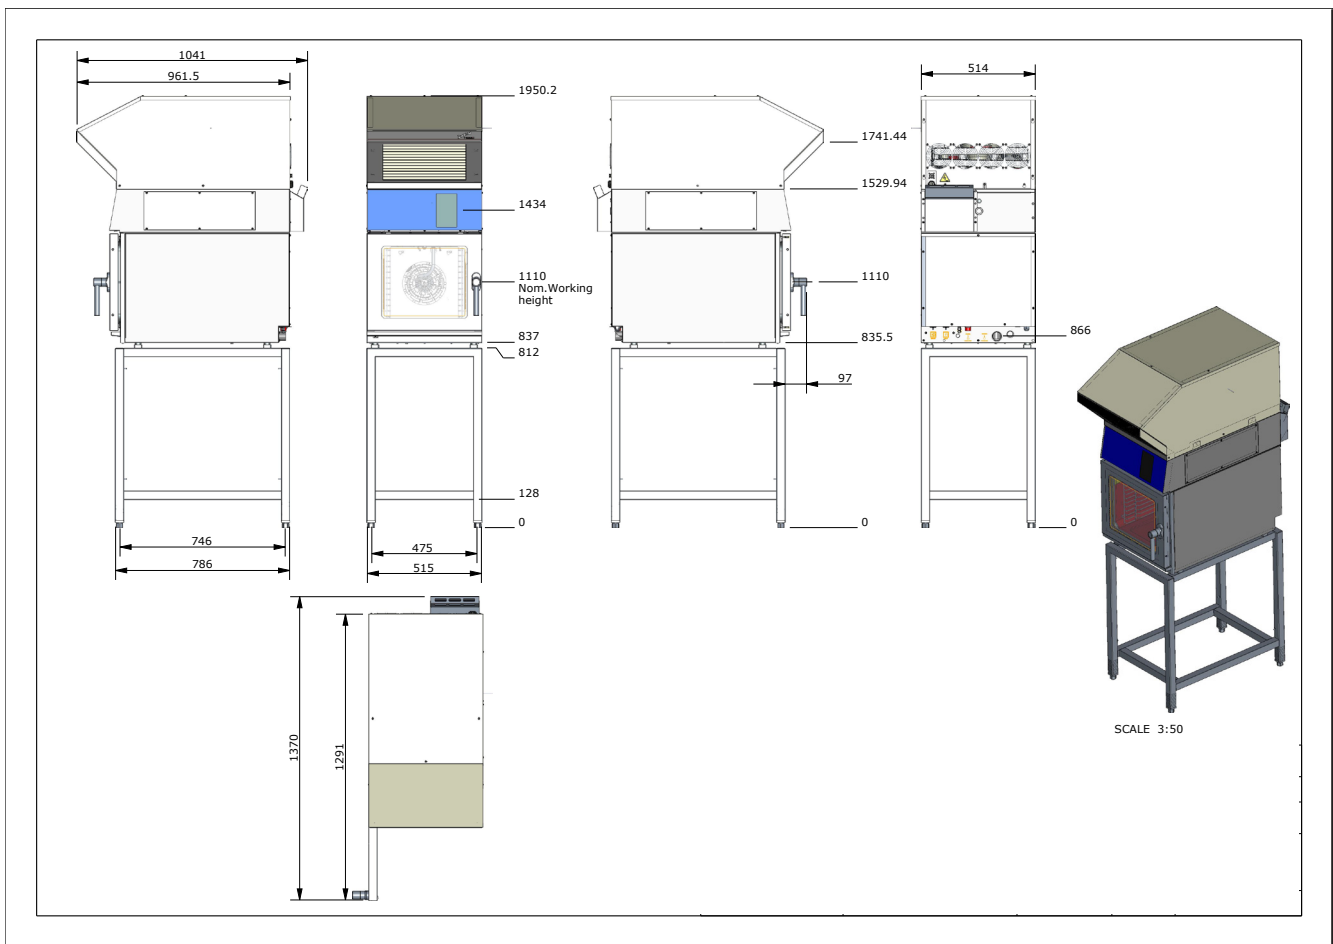

Cooking modes:

- Hot air (convection)
- Steaming
- Low-temperature steaming
- Forced steaming
- CombiSmart® humidity control, 10 steps
- Cook & Regen
- Proving, with automatic humidification
- Preheating
- Automatic cooling function
- Manual humidity pulsing
- Reversing, adjustable fan with 9 speeds
- SmartChef®, automatic cooking
- Automatic humidity pulsing
- RackTimer® with up to 20 timers
- Cool-down function
- Delta-T
- Cook & Hold

Features:

- HOUNÖ PROTECT start kit
- Multipoint temperature probe
- Chef's recipe collection
- Baker's recipe collection
- Favourites selection
- HACCP quality control, 60 days in PDF format
- USB connection

Optional features:

- Hand shower
- CombiWash® automatic cleaning system
- Let's Cook Cloud Solution
- Quick Select Recipes (QSR)
- Advanced RackTimer for tailored menu handling
- Keypad for temperature adjusting

Unavailable solutions:

- CombiPlus and Marine

Tested quality and safety:



FOR MORE INFORMATION, VISIT WWW.HOUNO.COM